BRUHAT BANGALORE MAHANAGARA PALIKE
YELAHANKA ZONE

(24)

Estimate Cost Rs. 1000000.00

Name of Work: Maintenance of Existing borewells and pipe lines in and arround areas of ward No- 01 of yelahanka Sub division.

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
1	Repairs to Motor Rewinding of Motor PRED SR (2012-13)P NO.54/ I.NO.10.1.2)								
	a) -Do - above 3HP upto 5HP	No	5				5	2575.00	12875.00
	Basic Rate	2500.00							
	Area Weightage @ 3 %	75.00							
	Total	2575.00							
2	Repairs to Motor Rewinding of Motor PRED SR (2012-13)P NO.54/ I.NO.10.1.3)								
	(Above 5HP upto 10HP add Rs.150/- for every 0.5 HP)								
	a) -Do - above 5HP upto 10HP	No	1				1	2884.00	2884.00
	Basic Rate	2800.00							
	Area Weightage @ 3 %	84.00							
	Total	2884.00							
	B) Replacement of Motor Parts:								
3	Upto 5HP Stator (with one year Gurantee) PRED SR (2012-13)P NO.55/ I.NO.10.3.3)	No	6				6	5201.50	31209.00
	Basic Rate	5050.00							
	Area Weightage @ 3 %	151.50							
	Total	5201.50							
4	Upper flange PRED SR (2012-13)P NO.55/ I.NO.10.3.7)	No	6				6	360.50	2163.00
	Basic Rate	350.00							
	Area Weightage @ 3 %	10.50							
	Total	360.50							
5	Lower flange PRED SR (2012-13)P NO.55/ I.NO.10.3.8)	No	6				6	360.50	2163.00
	Basic Rate	350.00							
	Area Weightage @ 3 %	10.50							
	Total	360.50							
6	Carbon Housing PRED SR (2012-13)P NO.56/ I.NO.10.3.12)	No	6				6	489.25	2936.00
	Basic Rate	475.00							
	Area Weightage @ 3 %	14.25							
	Total	489.25							
7	Thrust bearing block assembly complete with Segment bearing pad PRED SR (2012-13)P NO.56/ I.NO.10.3.13)	No	6				6	1184.50	7107.00

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
	Basic Rate	1150.00							
	Area Weightage @ 3 %	34.50							
	Total	**1184.50**							
8	c) Tip Carbon /Ferrodo pading PRED SR (2012-13)P NO.56/ I,NO.10.3.14)	No	6				6	154.50	927.00
	Basic Rate	150.00							
	Area Weightage @ 3 %	4.50							
	Total	**154.50**							
9	Bearing (Gun metal)Centrifugal cast Aluminium Bronze, bearing bush PRED SR (2012-13)P NO.56/ I,NO.10.3.16)	No	5				5	412.00	2060.00
	Basic Rate	400.00							
	Area Weightage @ 3 %	12.00							
	Total	**412.00**							
10	Motor Base with pin PRED SR (2012-13)P NO.56/ I,NO.10.3.18)	No	5				5	489.25	2446.00
	Basic Rate	475.00							
	Area Weightage @ 3 %	14.25							
	Total	**489.25**							
11	Re-erection charges of pumping machineries including overhauling and painting PRED SR (2012-13)P NO.56/ I,NO.10.3.20)	No	5				5	978.50	4893.00
	Basic Rate	950.00							
	Area Weightage @ 3 %	28.50							
	Total	**978.50**							
12	Labour Charge (overhauling) PRED SR (2012-13)P NO.56/ I,NO.10.3.22)	Job	5				5	566.50	2833.00
	Basic Rate	550.00							
	Area Weightage @ 3 %	16.50							
	Total	**566.50**							
	Replacement of pump parts:								
13	Pump bowls PRED SR (2012-13)P NO.56/ I,NO.10.2.)	No	6				6	721.00	4326.00
	Basic Rate	700.00							
	Area Weightage @ 3 %	21.00							
	Total	**721.00**							
14	Intermediate piece (I.P) with IP leaded bronze bush PRED SR (2012-13)P NO.56/ I,NO.10.2.2)	No	6				6	463.50	2781.00
	Basic Rate	450.00							
	Area Weightage @ 3 %	13.50							
	Total	**463.50**							
15	Oil seal PRED SR (2012-13)P NO.56/ I,NO.10.2.3)	No	6				6	128.75	773.00

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
	Basic Rate	125.00							
	Area Weightage @ 3 %	3.75							
	Total	**128.75**							
16	Oil seal steel bush PRED SR (2012-13)P NO.56/ I,NO.10.2.4)	No	6				6	154.50	927.00
	Basic Rate	150.00							
	Area Weightage @ 3 %	4.50							
	Total	**154.50**							
17	Guide vane PRED SR (2012-13)P NO.56/ I,NO.10.2.5)	No	6				6	180.25	1082.00
	Basic Rate	175.00							
	Area Weightage @ 3 %	5.25							
	Total	**180.25**							
18	Impeller (shell moulded with aluminium and Bonze) PRED SR (2012-13)P NO.56/ I,NO.10.2.6)	No	6				6	437.75	2627.00
	Basic Rate	425.00							
	Area Weightage @ 3 %	12.75							
	Total	**437.75**							
19	Discharge outlet (D.O) Bearing D.O Steel Bush PRED SR (2012-13)P NO.56/ I,NO.10.2.7)	No	6				6	458.35	2750.00
	Basic Rate	445.00							
	Area Weightage @ 3 %	13.35							
	Total	**458.35**							
20	D.O Bearing PRED SR (2012-13)P NO.56/ I,NO.10.2.8)	No	6				6	293.55	1761.00
	Basic Rate	285.00							
	Area Weightage @ 3 %	8.55							
	Total	**293.55**							
21	Steel bush (D.O) steel bush) PRED SR (2012-13)P NO.56/ I,NO.10.2.9)	No	6				6	154.50	927.00
	Basic Rate	150.00							
	Area Weightage @ 3 %	4.50							
	Total	**154.50**							
22	Pump shaft made out of stainless steel Centreless ground with key way (upto 8 stages) PRED SR (2012-13)P NO.56/ I,NO.10.2.11)	No	6				6	978.50	5871.00
	Basic Rate	950.00							
	Area Weightage @ 3 %	28.50							

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
	Total	**978.50**							
23	Pump key (Stainless steel) PRED SR (2012-13)P NO.56/ I,NO.10.2.12)	No	6				6	128.75	**773.00**
	Basic Rate	125.00							
	Area Weightage @ 3 %	3.75							
	Total	**128.75**							
24	Pump coupling (stainless steel) PRED SR (2012-13)P NO.56/ I,NO.10.2.13)	No	6				6	257.50	**1545.00**
	Basic Rate	250.00							
	Area Weightage @ 3 %	7.50							
	Total	**257.50**							
25	Cabble guard PRED SR (2012-13)P NO.56/ I,NO.10.2.15)	No	6				6	154.50	**927.00**
	Basic Rate	150.00							
	Area Weightage @ 3 %	4.50							
	Total	**154.50**							
26	Strainer PRED SR (2012-13)P NO.56/ I,NO.10.2.16)	No	6				6	154.50	**927.00**
	Basic Rate	150.00							
	Area Weightage @ 3 %	4.50							
	Total	**154.50**							
27	Brass Filter PRED SR (2012-13)P NO.56/ I,NO.10.2.17)	No	6				6	257.50	**1545.00**
	Basic Rate	250.00							
	Area Weightage @ 3 %	7.50							
	Total	**257.50**							
28	KSRB 2-2.1 : Earth work excavation for foundation of buildings, culverts water supply, sanitary line and electrical conduits either in pits or in trenches 1.5m and above in width, in ordinary soil not exceeding 1.5m, in depth including dressing the bottom and sides of pits and trenches, stacking the excavated soil clear from edges of excavation with lead upto 50m, after breaking of clods complete as per specifications, specification, No, KBS 2.1(a) / 2.3.5, No.5/Item No. 2.3)	Cum							
	for PVC pipe		1	1060.00	0.45	0.90	429.30		
							429.30	200.34	86005.96
	Basic Rate	189.00							
	Area Weightage @ 6%	11.34							

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
	Total	200.34							
29	Providing and fixing to wall, ceiling and floor, high density polyethylene pipes 6.00 kgs/sq.cm working pressure 75mm outside diameter raising mains & exposed distribution pipes with special flange, compression type fittings, wall clips, making good the wall, ceiling and floor including cost all material, labour charges, HOM of equipments and testing complete as per specifications.(P.N.93)	Rmtr							
	75 mm dia (It no.13.703)		1	500.00			500.00	320.12	160060.00
	Basic Rate	302.00							
	Area Weightage @ 6%	18.12							
	Total	320.12							
	63mm dia (It no.13.70.2)		1	560.00			560.00	278.78	156116.80
	Basic Rate	263.00							
	Area Weightage @ 6%	15.78							
	Total	278.78							
30	Refilling available earth around pipelines, cables in layers not exceeding 20cms in depth compacting each deposited layers by ramming after watering lead upto 50m and lift upto 1.5m including cost of labour complete as per specification (P. No.6 I.No.2.11)	cum							
			Qty Vide It.No.1				429.30	80.56	34584.41
	Basic Rate	76.00							
	6% area weightage	4.56							
	Total	**80.56**							
31	Supply and delivery of submersible pump sets suitable for borewell of 165 mm dia with specified dyty conditions as detailed below and satisfying performance characteristics for pump and moter specified in BIS with ISI mark with a minimum efficiency of 42% pump shall confirm to IS 8034/2002 and motor conforming to IS 9283/1995 with ISI certification with latest amendments for the following 15.0HP/11KW ATALANTA/SUGUNA/CRI/KIRLOSKAR /OTHER EQUIVALENT PUMPS (page no.XXXXII / Sl No 33 Code No.2)2016-17	set							

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
			2				2.00	70600.00	141200.00
	Basic Rate	70600.00							
32	Providing GI pipe50mm dia B class (Page No XVII Sl.no.509, code no.0154)	Rmtr							
			1	210.00			210.00		
							210.00	321.00	67410.00
	Basic Rate	321.00							
33	Providing & fixing R-socket GI pipe fitting (Page No XXXIX) GI FITTINGS TABLE)	No.							
			1	40.00			40.00	92.80	3712.00
	Basic Rate	92.80							
34	Supplying and drawing 3 crore flat PVC submersible pump cable manufactured with electrolytic grade copper with flexible copper conductor confirming to table 3 class 5 to IS: 8130-1984 and virgin grade PVC insulation and sheathed suitable for working voltage upto 1100 volts.)P No 49/ It.No.29c(1) 2.5sqm of 36 strands 0.3mm dia group-A KPWD Electrical SR 2014-15	Mtr							
			1	480.00			480.00	188.70	90576.00
	Basic Rate	188.70							
35	fabrication supplying and mounting MS box of 16 SWG Suitable for floor/wall mounting fully weather proof with provision for better heat dissipation provided with hinged front cover equipped with tamper proof locking arrangements with suitable size clamps with necessary cable entry pipe with gland and box should be finished 2 coats of red oxide primer paint and finally finished with approved colour enamelled metal paint etc., complete box of 21600sqcm @ Rs0.33 SWG (P-49 It.6.40.2) (KPWD Electrical Sr 2014-15)	Sqm Cm							
			5	1100.00	20.00		110000.00		
	Basic Rate	0.33					**110000.00**	0.34	37389.00
	3% area weightage	0.01							
	Total	**0.34**							
36	Gun metal non-return valve 50mm nominal bore horizontal pipe (Page No XXII Sl.no.659, code	No's							
			5	3.00			15.00	1150.00	17250.00
	Basic Rate	1150.00							

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
37	Gate valve 50mm nominal bore gun metal (Page.No XXII Sl.no.673, code no.0164)	No's							
			5	3.00			15.00	1650.00	24750.00
	Basic Rate	1650.00							
38	Providing & fixing of Union 50mm for GI pipe fitting (Page.No XXXIX) GI FITTINGS TABLE)	No's							
			5	3.00			15.00	223.70	3355.50
	Basic Rate	223.70							
39	Providing and fixing of 50mm GI Nipple to motor (Page.No XXXIX) GI FITTINGS TABLE)	No's							
			5	3.00			15.00	104.30	1564.50
	Basic Rate	104.30							
40	Labour charges for erection of new /repaired submersible pumpset along with GI pipes (32/50mm) cable (new submersible pumpset if required will be supplied by the department free of cost and released pump set should be handed over to department) including transportation (each length = 6.00m) (P.No - 564, I.No - 3, BWSSB SR 13-14)	Per length							
			5	50.00			250.00	90.64	22660.00
	Basic Rate	88.00	Nos						
	3% area weightage	2.64	Nos						
	Total	**90.64**	**Nos**						
41	Supplying and fixing miniature circuit breakers/isolators in existing MCB distribution boards using necessary fixing materials and wiring complete as required, 40 to 63 Amps DP (P.NO - 526, I.NO - 13D (a), BWSSB SR 13-14)	No's							
			5	1.00			5.00	906.40	4532.00
	Basic Rate	880.00							
	3% area weightage	26.40							
	Total	**906.40**							
42	Supplying and laying of L.T.U.G Cable having aluminiumconductor PVC insulated shethed galvanised steel wire/ steel tape armoured cable with PVC outer sheathing 1.1 KV class 4 core 16 sqmm cable (confirming to IS 1554) (P.NO - 553, I.NO - 10 (d), BWSSB SR 13-14)	Mtr							

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
			5	35.00			175.00	169.95	29741.25
	Basic Rate	165.00							
	3% area weightage	4.95							
	Total	169.95							
43	Digging of trenches of 0.6mm x 0.50 Mtrs wide refilling the trench to the required ground level and consolidating etc., Complete sutting road surfaces (P.NO - 554, I.NO - 12 (b), BWSSB SR 13-14) in hard soil	Mtr							
			5	30.00			150.00	56.65	8497.50
	Basic Rate	55.00							
	3% area weightage	1.65							
	Total	56.65							
44	Supplying and fixing Class-A GI Pipe on pole/ wall/drain crossing with necessary clamping arrangements for UG Cable of 1.1 KV class 40mm (P.NO - 555, I.NO - 15 (b), BWSSB SR 13-14)	Mtr							
			5	3.00			15.00	294.58	4418.70
	Basic Rate	286.00							
	3% area weightage	8.58							
	Total	294.58							
45	Miscelaneous and rounding off.								1146.00
								TOTAL	1000000.00
(Rupees Ten lakhs Only)									

CERTIFICATE

1 The work spot has been inspected and the work is found necessary.

2 The Estimate is prepared as per the PRED SR 2012-13 and PW,P & IWTD SR 2016-17 and BWSSB Electrical SR 2013-14

3 The provisions were made in this estimate are necessary and adequate.

4 This works come under B.B.M.P. limits.

Assistant Engineer
Ward No.01

Assistant Executive Engineer
Yelahanka Sub-Division
B.B.M.P

Executive Engineer
Yelahanka Division
B.B.M.P

Administrative Sanction for Rs. 10.00 lakhs
Ten lakhs only
is accorded under head P-1802-
-2016-17 P-1802-
EE/AA/42/16-17 16.2.17

TECHNICALLY SANCTIONED FOR Rs. 10.00 lakhs
Rupees Ten lakhs only
Under P-1802-2016-17
EE/TS/57/16-17
Dated 16.2.17 10.00 lakhs

150 - YELAHANKA AC

BRUHAT BANGALORE MAHANAGAR PALIKE
WARD: 1- KEMPEGOWDA WARD

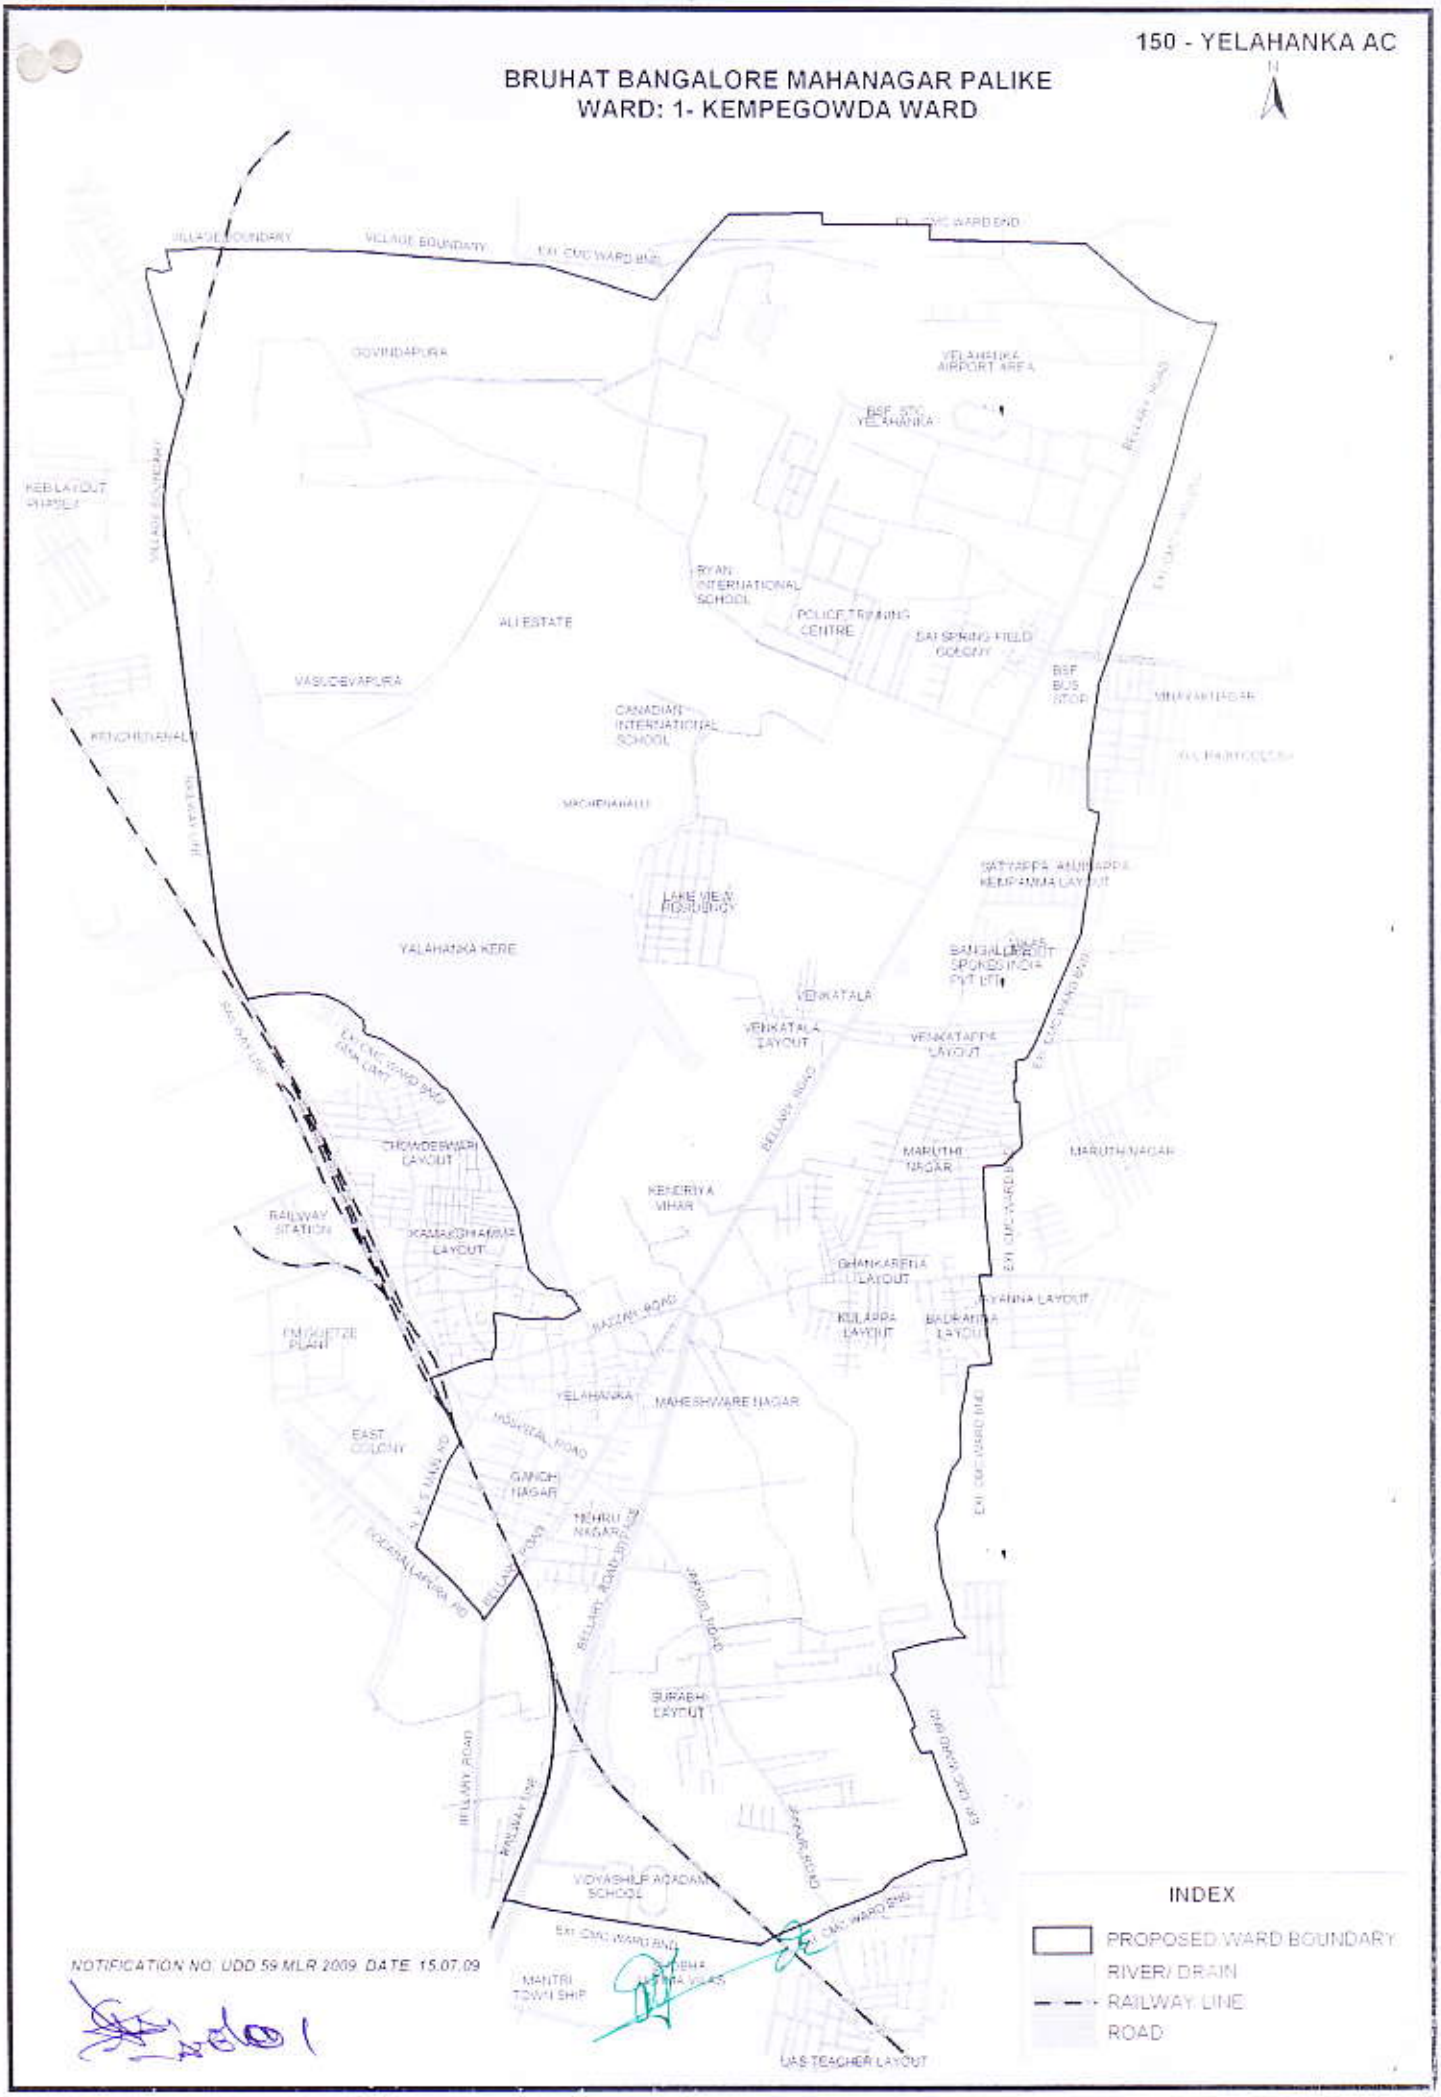

NOTIFICATION NO. UDD 59 MLR 2009 DATE 15.07.09

INDEX

- PROPOSED WARD BOUNDARY
- RIVER/ DRAIN
- RAILWAY LINE
- ROAD